


Home > Products > ProX Truss > BoltX<sup>™</sup> 12" Bolted I-Beam 3mm > 4 FT I-Beam 12" Bolted Box Pro Truss Segment 3mm

#### SKU: XT-BTD1204

Permalink: http://www.proxdire
--------------------------------

Search on Google

# 4 FT I-Beam 12" Bolted Box Pro Truss Segment 3mm

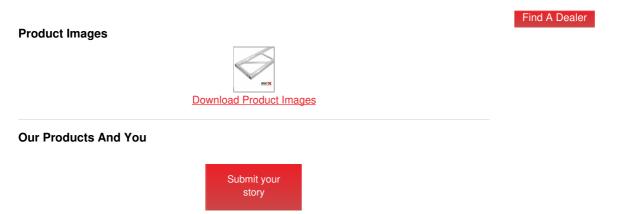

## ProX XT-BTD1204 I-Beam 12" Bolted Box Pro Truss Segment 3mm

#### Description

ProX XT-BTD1204 4 FT I-Beam 12" Bolted Box Pro Truss Segment 3mm I-Beam 12-inch Bolted Truss BoltX<sup>™</sup> Professional Box Truss is designed and engineered for many applications like stage lighting, concerts, Ninja Obstacle Course type construction, and similar uses. Setting ourselves apart from other box truss manufacturers BoltX<sup>™</sup> has an innovative end plate designed and manufactured with heavy-duty aluminum material, welded on both sides, and our exclusive circular rings at each corner of the truss to reduce or eliminate damage to the main chord ends.

Since box trussing is often dropped or dragged along concrete floors, this design will substantially lessen the need for expensive repairs to the tubes from the mishandling of the truss sections. Our outstanding quality control and manufacturing techniques assure excellent fitment at every connection to expedite your setups.

### Features

- 12" I-beam Professional Box Truss w/ Bolt Connection
- Industry Standard Bolt Pattern 6 3/4" x 6 3/4" with 5/8" Holes
- Load Tested & Inspected During Manufacturing and Quality Control
- Includes one set of two 5/8" 11 x 2.5" (NC) attachment bolts, nuts, and flat lock washers.
- · Compatible with most other 12" Professional Box Truss Manufacturers
- Outer Tube Diameter of 2", Wall Thickness 3mm (1/8"), Diagonal 1", Wall of 3mm (1/8"),
- · Welded to TÜV standards, 6082-T6 Alloy by GSI SLV-certified welders
- Finish: Natural Aluminum

Exterior Dimensions & Weight 2.00"H x 12.00"W x 48.00"L - Weight: 10.00 lbs

Shipping Dimensions & Weight Box 1 of 1: 2.50"H x 12.50"W x 49.00"L - Shipping Weight: 12.00 lbs

Suggested Shipping Method: Parcel

**UPC** 804589614715

